


## **Coaxial Isolator**

8.0 - 9.5 GHz

Outline Drawing (mm)

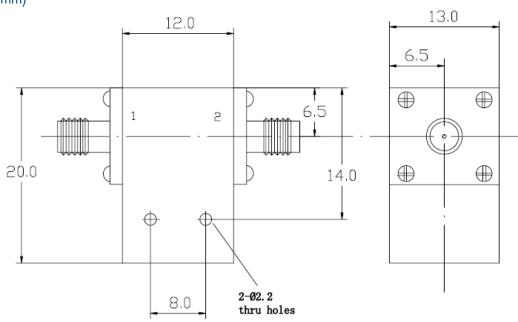

General Specification		
Frequency Range	8.0-9.5GHz	
Connectors	Input SMA Female	Output SMA Female
Insertion Loss	0.4 dB max.	
Isolation	23 dB min.	
VSWR	1.20 max.	
Power Handling	10W CW Forward / 2W CW Reverse	
Operating Temperature Range	-10 to +60°C	

Note 1: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved spec accuracy. Note 2: Operation beyond the quoted limits stated above may cause instantaneous and permanent damage.













